



**METER DATA**



CONSTRUCTION: ALUMINUM BODY ASTM B211-03  
 OPERATION: DIAPHRAGM (BUNA CONVOLUTED)  
 ACCURACY: +2% FULL SCALE  
 TEMPERATURE: 180°F / 80°C  
 PRESSURE: 500 PSIG - 3450 KPA  
 APPROX. WEIGHT: 3.75 LBS (1.7 KGS)

4" DIAL STANDARD - 6" DIAL AVAILABLE

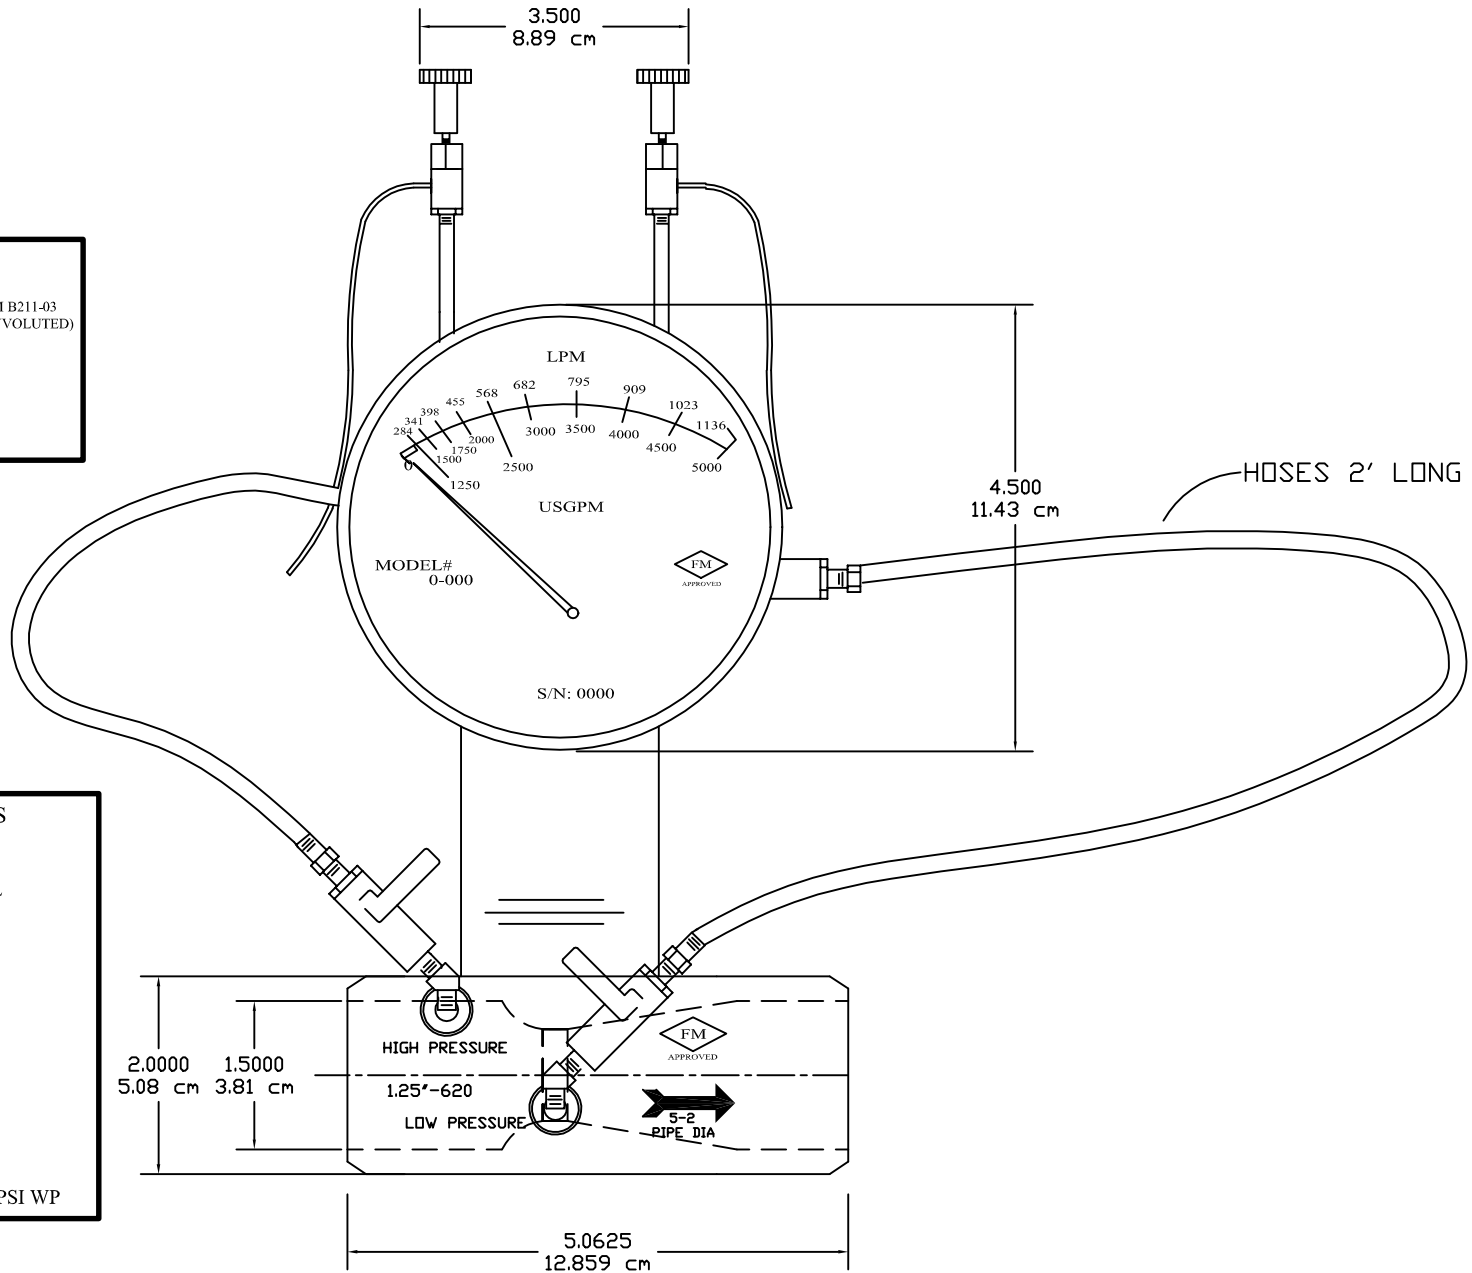

**CONSTRUCTION & SPECIFICATIONS**

**MATERIALS:** MACHINED 1018 CARBON STEEL  
ASTM A-108

**VALVES:** 1/4" BRASS BALL  
 Rated @ 600 WOG  
 Body: ASTM-B584  
 Tail Piece: ASTM B16 C36600  
 Ball: ASTM B16 C36600  
 (HARD CHROME PLATED)

**BRASS FITTING:** ASTM B16 C36600  
 Meets functional requirements of the  
 SAE J530, SAE J531 and ASA.

**ID TAG:** POLYCARBONATE

**HOSES:** Good Year® Hoses Rate at 750 PSI WP

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

**GLOBAL VISION INC.**

8800 JEFFERSON HWY  
OSSEO, MINNESOTA 55369  
763 - 391 - 0990

**FIRE PUMP ASSEMBLY  
1.25" BUTTWELD**

|     |          |                       |              |              |
|-----|----------|-----------------------|--------------|--------------|
| R-1 | 10/04/08 | ADDED NOTES/ MET DIMS | DATE:        | 02/21/08     |
|     |          |                       | SCALE:       | NTS          |
|     |          |                       | DWG #        | GVIFP1.25-BW |
|     |          |                       | APPROVED BY: | CPS          |