



METER DATA



CONSTRUCTION: ALUMINUM BODY ASTM B211-03
OPERATION: DIAPHRAGM (BUNA CONVOLUTED)
ACCURACY: + 2% FULL SCALE
TEMPERATURE: 180°F / 80°C
PRESSURE: 500 PSIG - 3450 KPA
APPROX. WEIGHT: 3.75 LBS (1.7 KGS)

4" DIAL STANDARD - 6" DIAL AVAILABLE

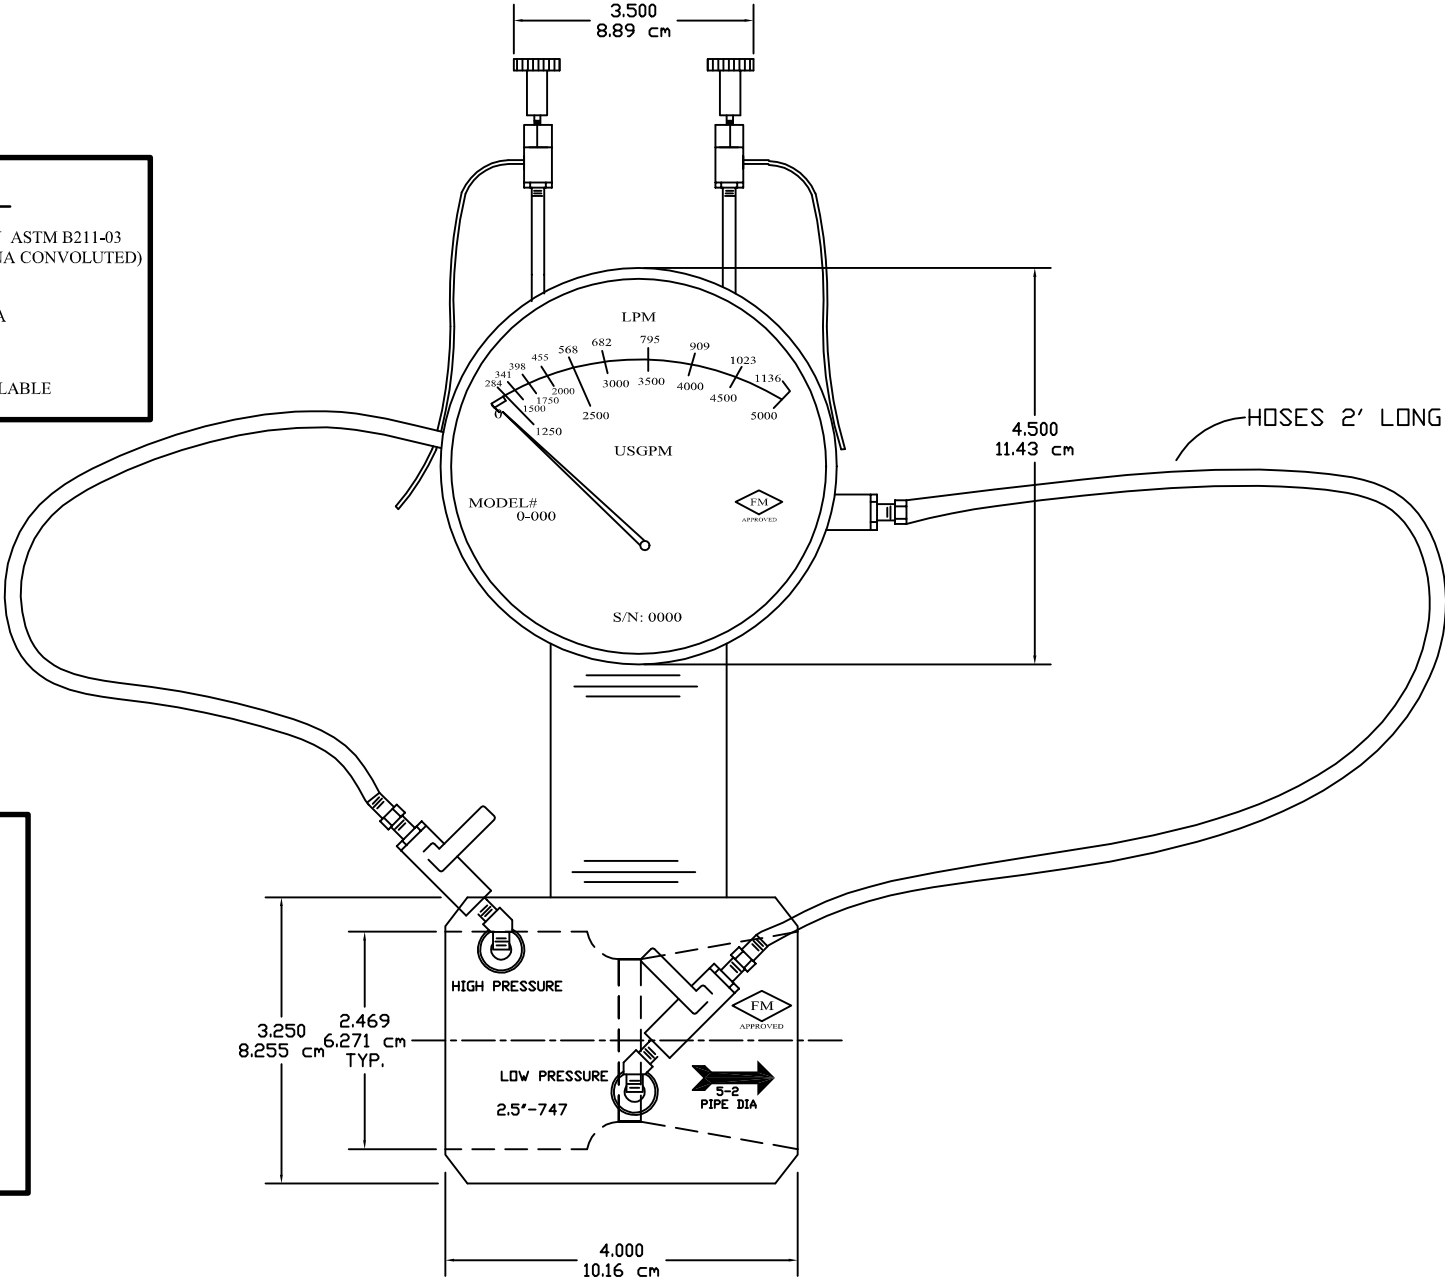

CONSTRUCTION & SPECIFICATIONS

MATERIALS: MACHINED 1018 CARBON STEEL
ASTM A-108

VALVES: 1/4" BRASS BALL
Rated @ 600 WOG
Body: ASTM-B584
Tail Piece: ASTM B16 C36600
Ball: ASTM B16 C36600
(HARD CHROME PLATED)

BRASS FITTING: ASTM B16 C36600
Meets functional requirements of the
SAE J530, SAE J531 and ASA.

ID TAG: POLYCARBONATE

HOSES: Good Year® Hoses Rate at 750 PSI WP

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

GLOBAL VISION INC.

8800 JEFFERSON HWY
OSSEO, MINNESOTA 55369
763 - 391 - 0990

**FIRE PUMP ASSEMBLY
2.5" BUTTWELD**

R-1	10/04/08	ADDED NOTES/ MET DIMS	DATE:	02/21/08
			SCALE:	NTS
			DWG #	GVIFP2.5-BW
			APPROVED BY:	CPS