



**METER DATA**



CONSTRUCTION: ALUMINUM BODY ASTM B211-03  
 OPERATION: DIAPHRAGM (BUNA CONVOLUTED)  
 ACCURACY: + 2% FULL SCALE  
 TEMPERATURE: 180°F / 80°C  
 PRESSURE: 500 PSIG - 3450 KPA  
 APPROX. WEIGHT: 3.75 LBS (1.7 KGS)

4" DIAL STANDARD - 6" DIAL AVAILABLE

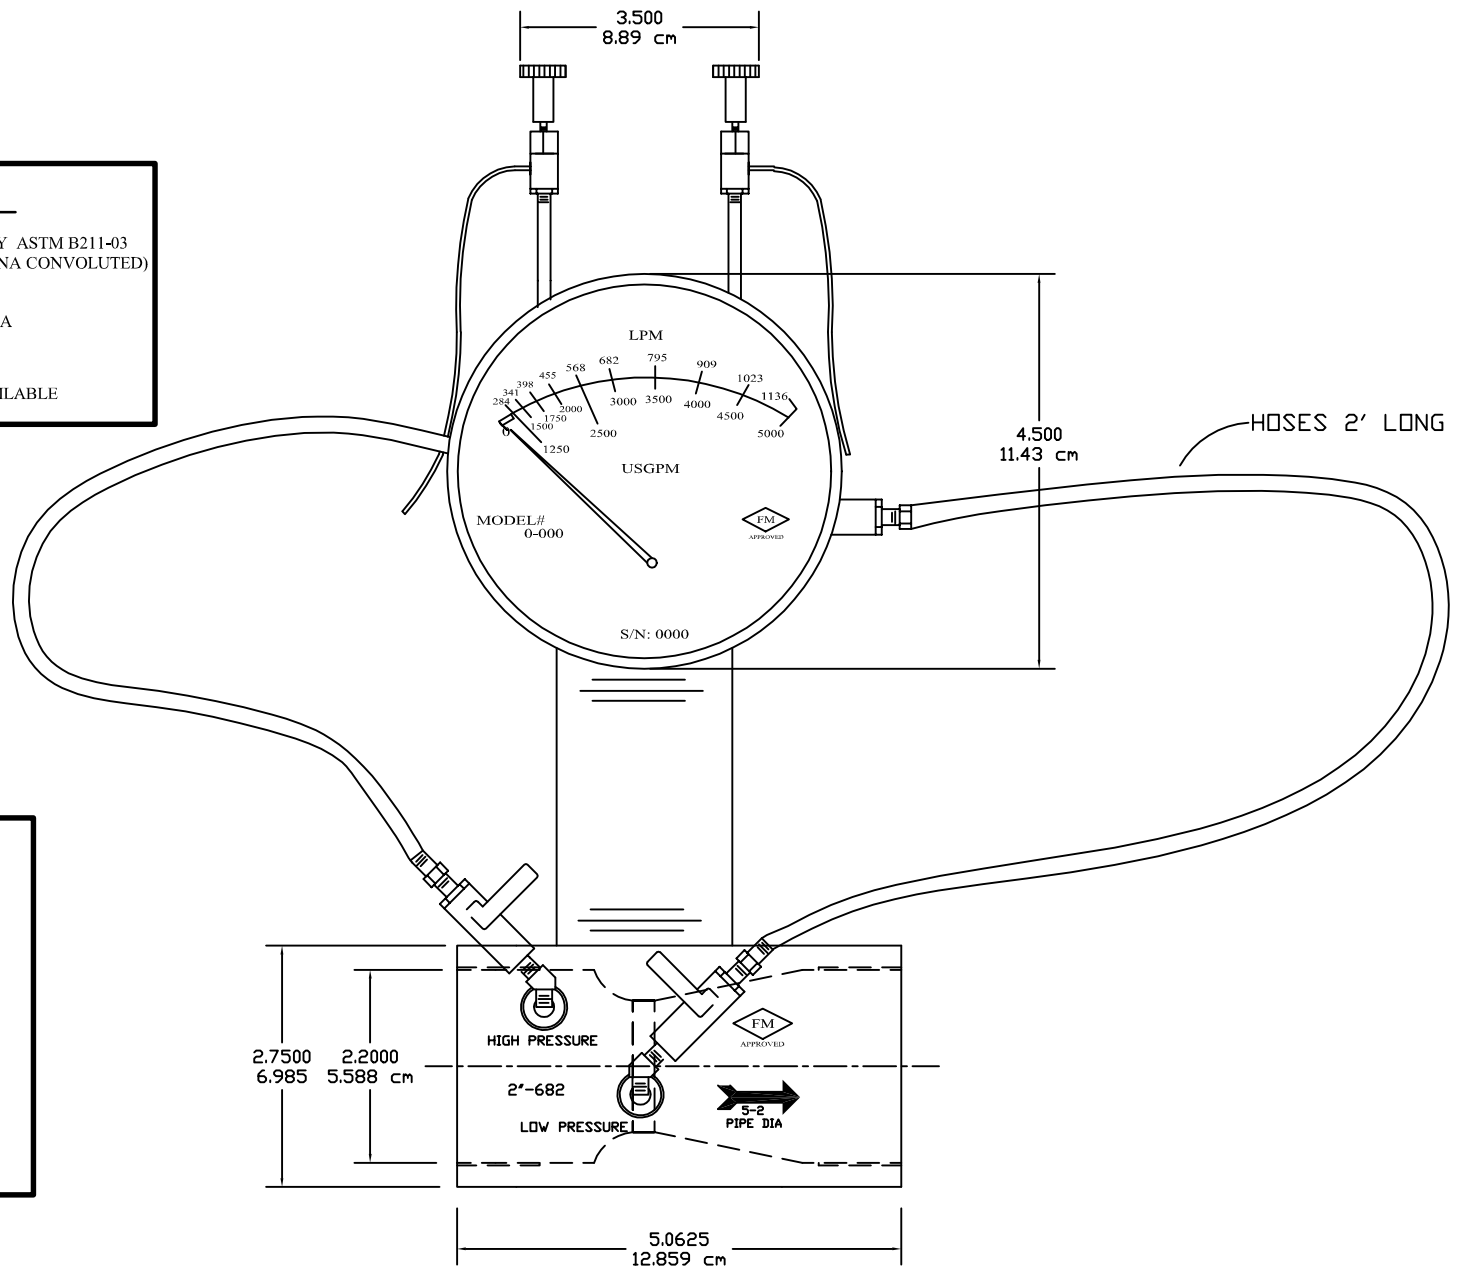

**CONSTRUCTION & SPECIFICATIONS**

MATERIALS: MACHINED 1018 CARBON STEEL  
ASTM A-108

VALVES: 1/4" BRASS BALL  
Rated @ 600 WOG  
Body: ASTM-B584  
Tail Piece: ASTM B16 C36600  
Ball: ASTM B16 C36600  
(HARD CHROME PLATED)

BRASS FITTING: ASTM B16 C36600  
Meets functional requirements of the  
SAE J530, SAE J531 and ASA.

ID TAG: POLYCARBONATE

HOSES: Good Year® Hoses Rate at 750 PSI WP

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

**GLOBAL VISION INC.**

8800 JEFFERSON HWY  
OSSEO, MINNESOTA 55369  
763 - 391 - 0990

**FIRE PUMP ASSEMBLY  
2" THREADED**

R-1	10/04/08	ADDED NOTES/ MET DIMS	DATE:	02/21/08
			SCALE:	NTS
			DWG #	GVIFP2-TH
			APPROVED BY:	CPS