



**METER DATA**



CONSTRUCTION: ALUMINUM BODY ASTM B211-03  
 OPERATION: DIAPHRAGM (BUNA CONVOLUTED)  
 ACCURACY: + 2% FULL SCALE  
 TEMPERATURE: 180°F / 80°C  
 PRESSURE: 500 PSIG - 3450 KPA  
 APPROX. WEIGHT: 3.75 LBS (1.7 KGS)

4" DIAL STANDARD - 6" DIAL AVAILABLE

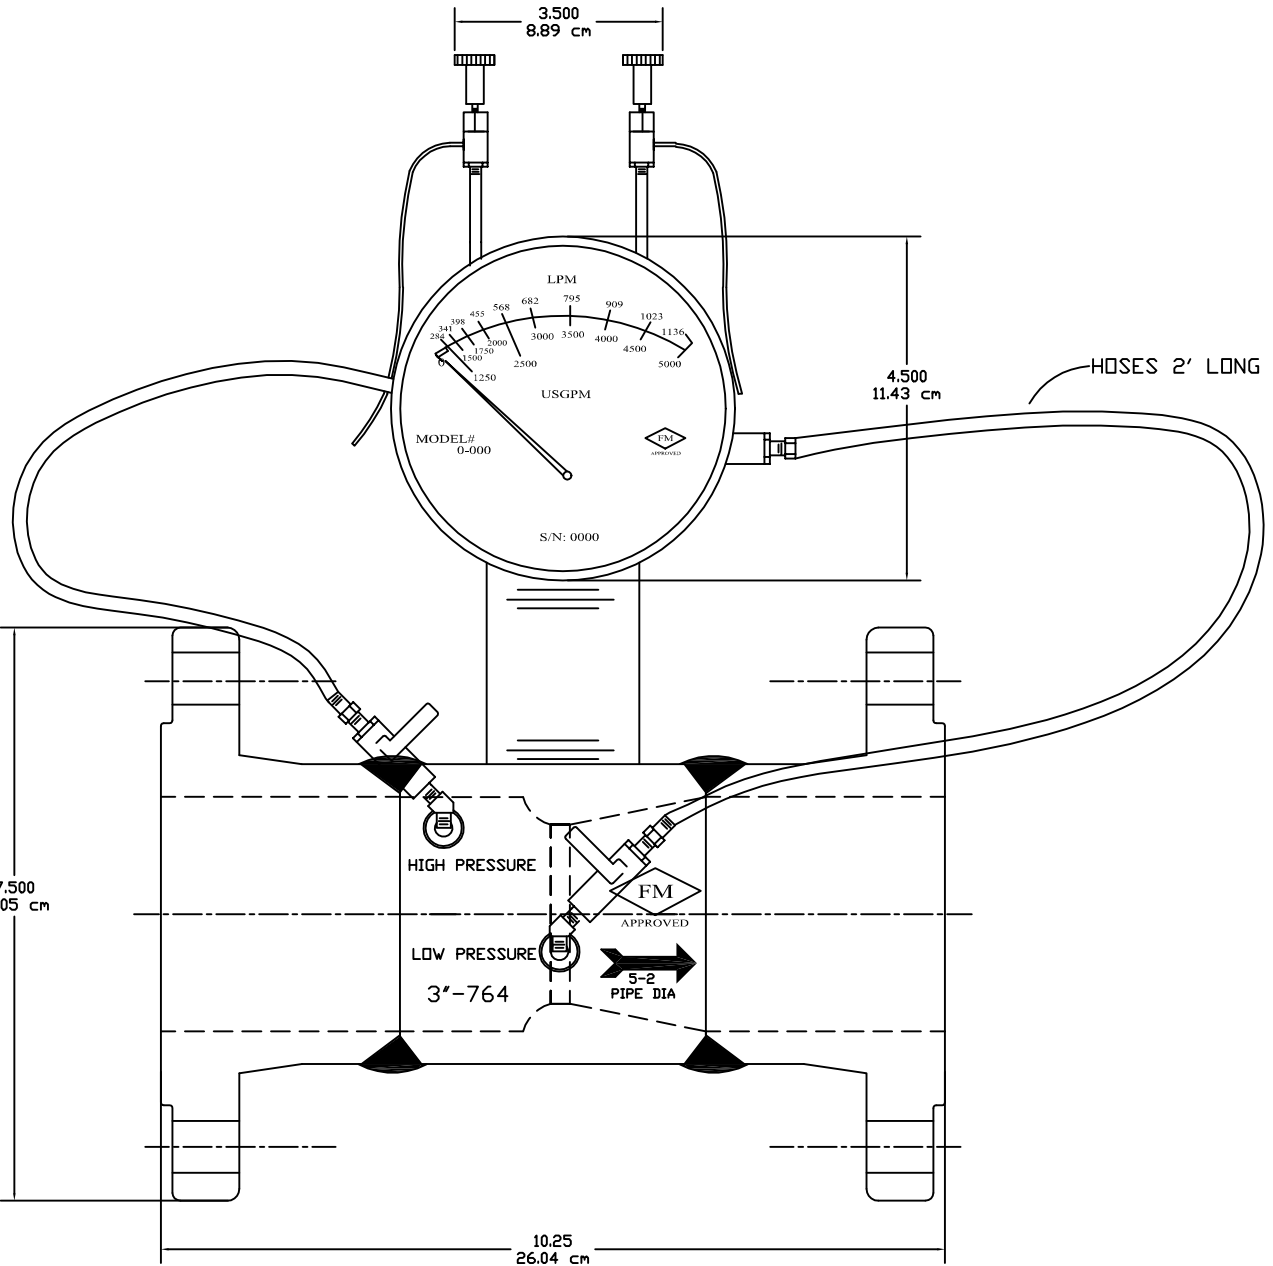

**CONSTRUCTION & SPECIFICATIONS**

**MATERIALS:** MACHINED 1026 CARBON STEEL  
 ASTM A-106 - B/C HRS  
 or  
 ASTM A-216 Gr. WCB CAST STEEL

**VALVES:** 1/4" BRASS BALL  
 Rated @ 600 WOG  
 Body: ASTM-B584  
 Tail Piece: ASTM B16 C36600  
 Ball: ASTM B16 C36600  
 (HARD CHROME PLATED)

**BRASS FITTING:** ASTM B16 C36600  
 Meets functional requirements of the  
 SAE J530, SAE J531 and ASA.

**FLANGE:** 300# ANSI B 16.5

**WELDING:** ASME B31.1 INTERPRETATION No. 32  
**FLANGES:** PRESSURE VESSEL IX

**ID TAG:** POLYCARBONATE

**HOSES:** Good Year® Hoses Rate at 750 PSI WP

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

**GLOBAL VISION INC.**  
 8800 JEFFERSON HWY  
 OSSEO, MINNESOTA 55369  
 763 - 391 - 0990

**FIRE PUMP ASSEMBLY  
 3" FLANGED 300#**

|  |  |  |  |              |              |
|--|--|--|--|--------------|--------------|
|  |  |  |  | DATE:        | 10/04/08     |
|  |  |  |  | SCALE:       | NTS          |
|  |  |  |  | DWG #        | GVIFP3-300-F |
|  |  |  |  | APPROVED BY: |              |