



METER DATA



CONSTRUCTION: ALUMINUM BODY ASTM B211-03
OPERATION: DIAPHRAGM (BUNA CONVOLUTED)
ACCURACY: + 2% FULL SCALE
TEMPERATURE: 180°F / 80°C
PRESSURE: 500 PSIG - 3450 KPA
APPROX. WEIGHT: 3.75 LBS (1.7 KGS)

4" DIAL STANDARD - 6" DIAL AVAILABLE

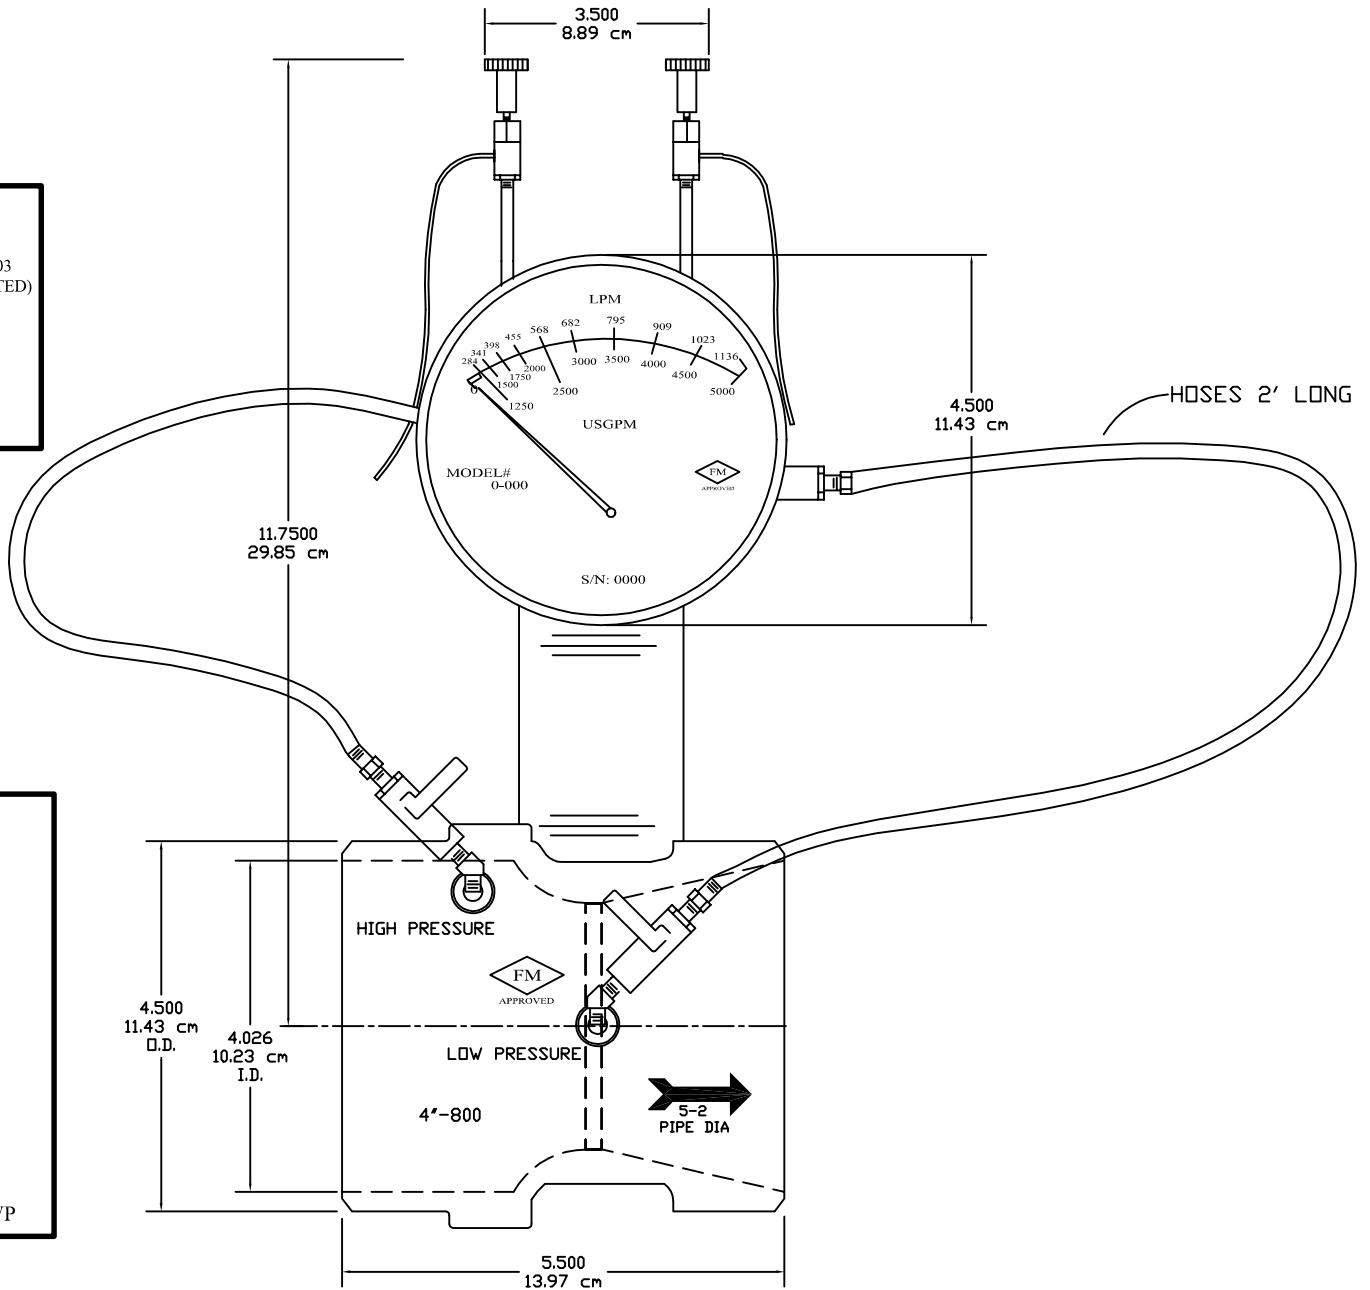

CONSTRUCTION & SPECIFICATIONS

MATERIALS: MACHINED 1026 CARBON STEEL
 ASTM A-106 - B/C HRS
 or
 ASTM A-216 Gr. WCB CAST STEEL

VALVES: 1/4" BRASS BALL
 Rated @ 600 WOG
 Body: ASTM-B584
 Tail Piece: ASTM B16 C36600
 Ball: ASTM B16 C36600
 (HARD CHROME PLATED)

BRASS FITTING: ASTM B16 C36600
 Meets functional requirements of the
 SAE J530, SAE J531 and ASA.

ID TAG: POLYCARBONATE

HOSES: Good Year® Hoses Rate at 750 PSI WP

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

GLOBAL VISION INC.

8800 JEFFERSON HWY
 OSSEO, MINNESOTA 55369
 763 - 391 - 0990

**FIRE PUMP ASSEMBLY
 4" BUTTWELD**

| | | | | |
|-----|----------|-----------------------|--------------|-----------|
| R-1 | 10/04/08 | ADDED NOTES/ MET DIMS | DATE: | 02/21/08 |
| | | | SCALE: | NTS |
| | | | DWG # | GVIFP4-BW |
| | | | APPROVED BY: | CPS |